

# JOINT WMO TECHNICAL PROGRESS REPORT ON THE GLOBAL DATA PROCESSING AND FORECASTING SYSTEM AND NUMERICAL WEATHER PREDICTION RESEARCH ACTIVITIES FOR 2017

## Central Institute for Meteorology and Geodynamics, Austria

### 1. Summary of highlights

The continuation of the development of an NWP based nowcasting system based on the AROME model including a rapid update 3DVAR assimilation system was a major focal point in the 2017. The nowcasting system is designed to support the current conventional nowcasting system INCA in the future and help to increase the forecast quality within the first 1 to 6 hours, in particular for (convective) precipitation forecasts. In addition major effort was put into the development of C-LAEF, the AROME based ensemble system with a main focus on an improved representation of the model physics uncertainty by extending the current stochastic physics scheme in AROME.

The INCA system itself has been further revised with respect to model background to get more benefit when using first guess fields from convection resolving models. Further, the improvement of data filter algorithms and a better estimation of analysis and nowcasts uncertainty were research topics in 2017. Tests with INCA using 100m horizontal resolution have also been part of the research work.

### 2. Equipment in use

Computers used for the forecasting system are HPE/SGI and several Linux virtual servers for post-processing purpose:

Computer	RAM Memory	Storage
HPE Apollo 8600 (= SGI ICE XA) 192 nodes a 36 cores	96 per node	350 TB
12 Linux (a 8-32 cores) for post-processing	8 - 64GB	300 TB

### 2. Data and Products from GTS in use

- SYNOP
- TEMP/PILOT
- AMDAR/ACARS
- SHIP
- FAX
- GRIB
- BUFR

### 4. Forecasting system

#### 4.1 System run schedule and forecast ranges

At ZAMG, two deterministic short range forecast models and one limited area ensemble prediction systems are operated: ALARO (5km horizontal resolution, 4 runs per day) and AROME (2.5km, 8 runs per day), LAEF (11km, 2 runs per day)

ALARO (5km, 60 Levels):

Suite	Analysis time + forecast range	Product availability
1	00UTC + 72 h	2:45 UTC
2	06UTC + 72 h	8:45 UTC
3	12UTC + 72 h	14:45 UTC
4	18UTC + 72 h	20:45 UTC

AROME (2.5km, 90 Levels):

Suite	Analysis time + forecast range	Product availability
1	00UTC + 60 h	03:30 UTC
2	03UTC + 60 h	06:30 UTC
3	06UTC + 60 h	09:30 UTC
4	09UTC + 60 h	12:30 UTC
5	12UTC + 60 h	15:30 UTC
6	15UTC + 60 h	18:30 UTC
7	18UTC + 60 h	21:30 UTC
8	21UTC + 60 h	00:30 UTC

LAEF (11km, 47 Levels):

Suite	Analysis time + forecast range	Product availability
1	00 UTC + 72 h	04:00 UTC
2	12 UTC + 72 h	16:00 UTC

## 4.2 Medium range forecasting system (4-10 days)

## 4.3 Short-range forecasting system (0-72 hrs)

### 4.3.1 Data assimilation, objective analysis and initialization

Atmospheric initial conditions of the ALARO system at ZAMG are generated by dynamical downscaling of the ECMWF IFS-HRES model. Soil moisture and temperature are derived from an Optimum Interpolation system (called CANARI) assimilating 2m temperature and relative humidity measurements of GTS SYNOP and of high dense national TAWES surface station network.

AROME uses an incremental 3D-Var system to create initial state of 3D atmospheric variables. The control variable includes horizontal wind, temperature, specific humidity and surface pressure, while hydrometeors are taken from the previous model integration "first guess" and non-hydrostatic variables and TKE are initialised by a constant value. The static background error matrix B was defined by using 78 downscaled ensemble forecast differences of the Austrian ensemble system LAEF. For surface, as it is the case for ALARO, an Optimum Interpolation method is used to initialize surface fields. Furthermore the snow is initialised by a high resolution external snow model SNOWGRID and satellite observations.

Observation type	assimilated fields	Data source
SYNOP+TAWES	T2m,RH2m,U10m,V10m,f	ZAMG+OPLACE
AMDAR/ACARS (aircraft)	U,V,T	ZAMG+OPLACE
GEOWIND (SAT-winds) MSG3	U,V	OPLACE
TEMP (radio soundings)	U,V,T,Q,f	ZAMG+OPLACE
PILOT	U,V	ZAMG
MSG2->MSG3-SEVIRI	WV-radiances	OPLACE

NOAA18/19+MetOp-A-B AMSU-A,-B,MHS,HIRS	radiances	OPLACE
MetOp-A IASI	radiances	OPLACE
ASCAT 10m sea winds	U10m,V10m (25km)	ZAMG/EUMETSAT
GPS [test mode]	zenith total delay (ZTD)	TU-Vienna, EGVAP
RADAR [test mode]	Reflectivity, doppler winds	AustroControl,OPERA, other NMS
Lake surface temperatures [test mode]	TS_WATER in OIMAIN	Hydrological services
MODIS-snow cover [test mode]	snow yes/no	ENVEO-CRYOLAND

Table 1: Observations entering AROME assimilation system

The use of GPS-ZTD and Radar is not yet part of the operational AROME runs at ZAMG, but future application is currently tested. Furthermore the assimilation of AMDAR humidity and MODE-S aircraft data is in preparation. The Transformation of the model variables to satellite radiances and vice versa is done by using the radiative transfer model RTTOV.

### 4.3.2 Model

#### 4.3.2.1 In operation

##### ALARO:

The limited area model ALARO is a further development of the ALADIN model for horizontal resolutions around 5km and higher. ALARO is being developed within the international numerical weather prediction project ALADIN and RC LACE. The main differences between ALARO and its precursor ALADIN can be found in the model physics, whereas convection, microphysics, turbulence and radiation should be named in the first place. In order to handle convection properly on horizontal scales around 5km, the prognostic convection scheme called 3MT (Gerard et. al. 2009) was developed. In ALARO cloud condensate originating from resolved condensation processes and condensate produced in the convection scheme are combined before they enter the microphysical part in the model. Beside convection and microphysics several further changes are planned for ALARO, mainly in the radiation scheme and in the turbulence parameterization major developments are to be expected to enter the operational system soon.

ALARO is used in operational mode at ZAMG since March 2011, while the system has undergone several updates recently. It runs on a horizontal resolution of 4.8km and uses 60 levels in the vertical. The model is run four times per day, whereas the integration is performed up to 72 hours lead time. ALARO (the configuration run at ZAMG is also named ALARO5-AUSTRIA) is coupled to the global IFS HRES model of ECMWF. For ALARO5-AUSTRIA, the initial state for the free atmosphere is provided by interpolation of the IFS model fields to 4.8km model grid. A surface assimilation system is run at ZAMG and fed with SYNOP and high-density TAWES (Semi-automatic weather stations in Austria) data to produce the initial state for the surface fields using an optimum interpolation method. Details about the model characteristics can be also read from Table 2.

Horizontal resolution:	4.8 km
Number of levels:	60, pressure-based, hybrid coordinate
Number of grid points:	600 x 540
Time-step:	180 sec, 2-time-level SLSI time integration
Coupling model:	IFS (time lagged)
Coupling frequency:	3 hours, Davies-Kallberg relaxation scheme
Forecast range:	72h
Output every:	1 hour
Physics:	ALARO-0 physics (prognostic large scale cloud and precipitation scheme + prognostic convection scheme 3MT, pseudo-prognostic

Orography:	TKE scheme, etc.), Boer-type scheme of gravity wave drag; ISBA surface scheme;
Grid:	mean
Initialization:	linear
	OI for surface, IFS for upper air (DFI applied)

Table 2: ALARO model characteristics

#### AROME:

The non-hydrostatic spectral convection permitting limited area model AROME (Applications of Research to Operations at Mesoscale, Seity et al. 2011) is especially designed to run on very high resolutions with 2.5km grid space and beyond. At ZAMG it was set to operations by the end of 2013, after an intense testing and evaluation phase. It uses the non-hydrostatic dynamical core developed by Bénard et al. 2009. The Turbulence scheme is a 1.5 order 1D prognostic TKE scheme by Cuxart et al. 2010. Deep convection is treated explicitly, while shallow convection is parameterised with a massflux approach (Pergaud et al. 2009). The one moment bulk microphysics scheme ICE3 (Pinty and Jabouille 1998) can handle mixing ratios of five prognostic hydrometeor classes: cloud water, cloud ice, rain, snow and graupel and simulates also complex interactions between them. Different to ALADIN and ALARO, AROME uses by default a three layer soil model SURFEX with a tile approach including also parameterisations of town and sea effects. The radiation scheme follows the approaches of the European Centre for Medium Range Forecast (ECMWF) by Morcrette (1991) and Mlawer et al. (1997). Orographic effects (reduced sky view, slope angle, orographic shadowing) on surface radiation fluxes have been recently added. In 2017 two minor upgrades were implemented, updating the suite to a newer model version and putting local developments into operations.

Horizontal resolution:	2.5 km
Number of levels:	90, pressure-based, hybrid coordinate
Number of grid points:	600 x 320
Time-step:	60 sec, 2-time-level SLSI time integration
Coupling model:	IFS (time lagged)
Coupling frequency:	1 hour, Davies-Kallberg relaxation scheme
Forecast range:	60h
Output every:	1 hour
Physics:	AROME/MESO-NH
Orography:	mean
Grid:	linear
Initialization:	OI for surface, 3DVAR for upper air

Table 3: AROME model characteristics

#### **4.3.2.2 Research performed in this field**

In 2017, the main work was dedicated to the development of an AROME nowcasting version which is planned to become operational as a complement to the current operational AROME forecasting system (Table 3) in order to improve in particular the 0-12hours forecast range.

The key characteristics of the AROME nowcasting system can be summarized as:

- hourly rapid update assimilation system (3DVAR) followed by 12 hour forecasts
- lateral coupling to operational AROME system
- 25min cut-off time
- additional observations in assimilation: radar reflectivity and radial winds, Mode-S and GNSS ZTD
- latent heat nudging of INCA 2D precipitation analysis included

- initial condition for surface from operational AROME
- horizontal resolution 1.2km

First results with the AROME nowcasting system show rather promising results. The system is expected to enter a pre-operational phase in 2019.

### **4.3.3 Operationally available NWP products**

### **4.3.4 Operational techniques for application of NWP products**

#### **4.3.4.1 In operation**

A so-called 'META'-forecast system is in operation for short and medium range forecasts. It utilizes the output of several global and limited-area models (ECMWF, ALARO, AROME, ICON, ICON-EU, UKMO, GFS) available at ZAMG to generate bias-corrected, optimized, weighted point forecasts of standard meteorological quantities at surface station locations. It has been extended to further NWP models and a regime-dependant experimental set up has been implemented.

#### **4.3.4.2 Research performed in this field**

Ensemble systems aim at representing a range of possible future states of the atmospheric system. However, ensemble forecasts still tend to be underdispersive and biased. Thus, they should be post-processed with statistical models such as the nonhomogenous Gaussian regression (NGR, Gneiting et al. 2005). For temperature, NGR returns a Gaussian predictive density distribution where the location and scale parameters depend on the raw ensemble.

Following Scheuerer and König (2014), the original NGR approach is modified using local observation and forecast anomalies to remove site-specific characteristics. Therefore, a single model can be fitted for all available stations simultaneously. Observation and forecast anomalies are computed by subtracting site-specific climatological means from the observations and forecasts, respectively. Thus, the improvement of the calibrated ensemble system strongly depends on the quality of climatological means.

The method is implemented for a multi-model ensemble consisting of the LAEF (Limited Area Ensemble Forecasting) System, ECMWF-ENS and high resolution deterministic forecasts, and adapted for gridded temperature, relative humidity, wind and precipitation forecasts. As observational background the 1 km gridded INCA analyses were used taking advantage of calibrating the ensemble data with highly resolved observations.


### **4.3.5 Ensemble Prediction System**

#### **4.3.5.1 In operation**

The operational LAMEPS system at ZAMG, ALADIN-LAEF (Wang *et al.* 2010) has been upgraded several times during the last years. The generation of initial perturbations in the ALADIN-LAEF system is implemented as follows: 1) Upper air perturbations to initial conditions are calculated by blending the large scale perturbation generated by the ECMWF, using the Singular Vector method, with the small scale perturbation generated by ALADIN-Breeding; 2) To represent uncertainties in the surface fields a surface assimilation scheme with perturbed observations is implemented. To consider perturbations due to model uncertainties a multi-physics scheme is applied as well.

Currently ALADIN-LAEF is running under the SMS (Supervisor Monitoring Scheduler) environment on high computer facility of ECMWF twice per day (00 and 12UTC), consisting of 16 perturbed members and one control member, on 11 km horizontal resolution, with 45 levels in the vertical. The domain of the perturbed members and the control run covers Europe and a large part of the North Atlantic (Fig. 2). Hourly output of the forecasts is provided and selected data are archived in MARS at ECMWF. Data are also archived in the framework of TIGGE-LAM. ALADIN-LAEF forecasts are operationally distributed to Czech Republic, Slovakia, Slovenia, Romania and Turkey.

The current operational ALADIN-LAEF system is planned to be replaced by the convection permitting version C-LAEF in the future (see 4.3.5.2)

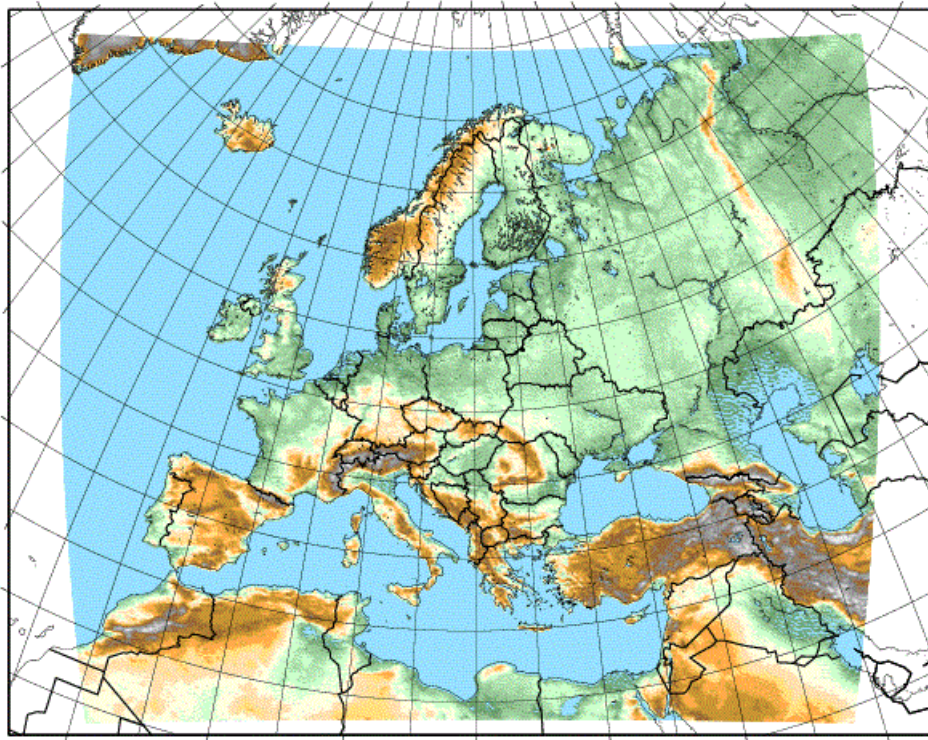


**Figure 2:** ALADIN-LAEF domain and model topography.

#### 4.3.5.2 Research performed in this field

LAMEPS is a major field of research in the NWP group at ZAMG. The focus of research is on the development of the 2.5km ensemble forecasting system C-LAEF (Convection permitting Limited Area Ensemble Forecasting). C-LAEF is based on the spectral limited area AROME model and comprises 16 ensemble members which are coupled with the first 16 out of a total of 51 members of ECMWF-ENS. Coupling is done every three hours using a Davies relaxation scheme. The domain of C-LAEF corresponds to the operational AROME domain at ZAMG. C-LAEF has 90 vertical levels, a time step length of 60 seconds and 30 hours forecast range. 2 runs per day (00 and 12 UTC) are envisaged.

The focus of research in the C-LAEF development is put on a reasonable representation of all possible sources of uncertainties in a NWP model: Uncertainties originating from the initial conditions, from the coupling model and also uncertainties coming from the limited-area model itself (model error). The representation of initial condition uncertainties is based on a combination of ensemble data assimilation (EDA, perturbation of 3D observations), EDA of surface parameters and Ensemble JK. In Ensemble JK the small-scale uncertainties coming from EDA are combined with large-scale perturbations coming from the coupling model.

The representation of model error is done by implementing different methods of stochastic physics. The very popular SPPT approach (perturbation of total model tendencies by a stochastic pattern, Palmer et al., 2009) has been successfully implemented and tested. Additionally, an approach where the single partial tendencies of the physics schemes radiation, turbulence, shallow convection and microphysics are perturbed separately has been developed at ZAMG (pSPPT). In the turbulence scheme of C-LAEF, also a parameter perturbation scheme has been tested, where critical parameters in the turbulence parametrisation are directly perturbed by a stochastic pattern. Verification scores have shown that all these methods increase ensemble spread compared to a C-LAEF set-up without stochastic physics. Best performance has been achieved with a hybrid system (HS) combining the partial tendency perturbation approach in the radiation, shallow convection and microphysics scheme of C-LAEF with a parameter perturbation approach in the turbulence scheme (green line in Figure 3).

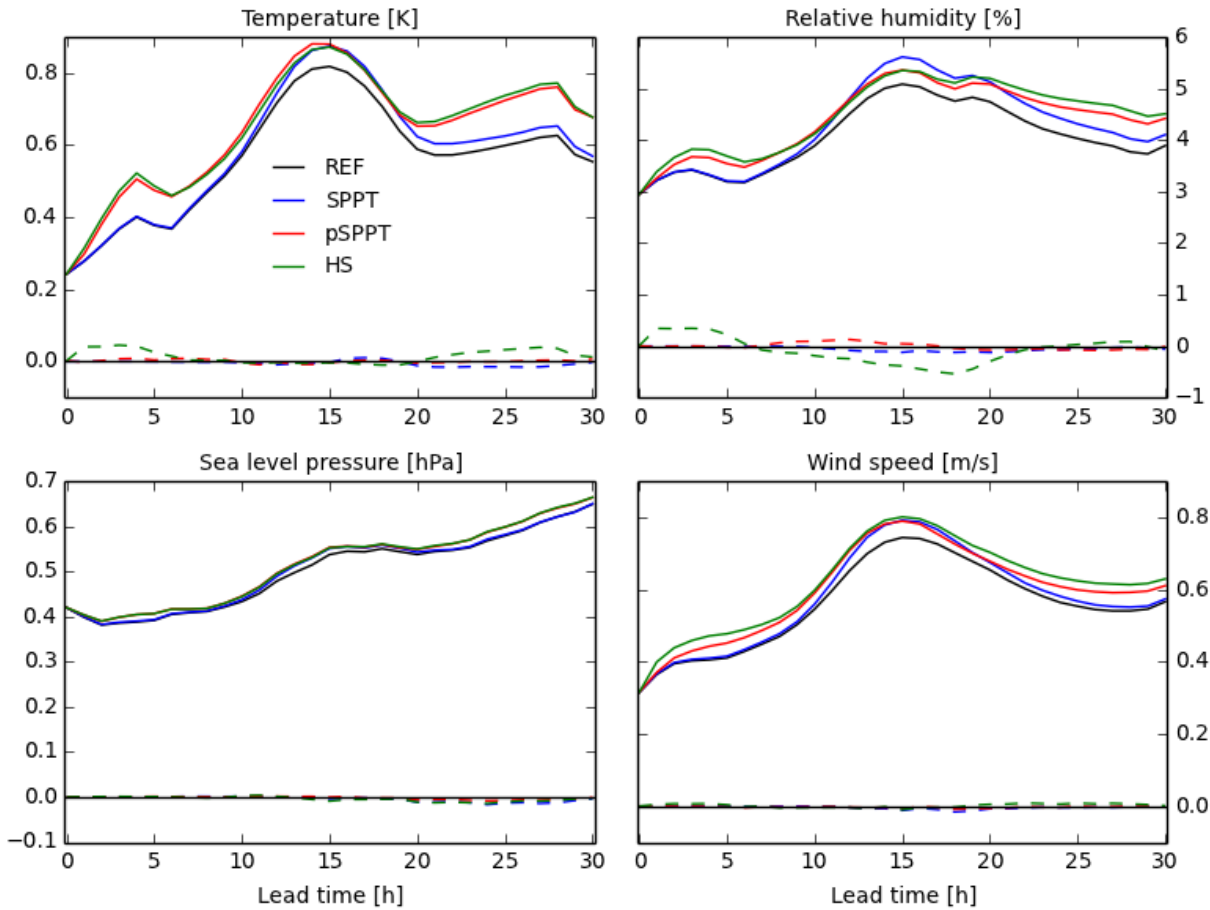

**Figure 3:** Ensemble spread (solid lines) and RMSE (dashed lines) as a function of lead time for several surface parameters in July 2016. Spread is given in absolute numbers, RMSE is given as difference to an ensemble without any stochastic physics (experiment - REF).

#### 4.3.5.3 Operationally available EPS Products

The following ALADIN-LAEF products are available at 1h time resolution

- Probability-charts for various parameters and thresholds
- EPSgrams

## 4.4 Nowcasting and Very Short-range Forecasting Systems (0-6 hrs)


### 4.4.1 Nowcasting system

#### 4.4.1.1 In operation

The high-resolution analysis and nowcasting system INCA (Integrated Nowcasting through Comprehensive Analysis) developed at ZAMG provides three-dimensional fields of temperature and humidity on an hourly basis, and of wind in 10 min intervals. Two-dimensional fields of precipitation rate, precipitation type, and cloudiness are provided at 5 - 15 minute intervals.

The system is operated with a horizontal resolution of 1 km and a vertical resolution of 100-200 m on the region shown in Fig. 4. INCA combines surface station data, remote sensing data (radar, satellite), forecast fields of the numerical weather prediction model ALADIN, and high-resolution topographic data (Haiden *et al.*, 2011).

## INCA Domain & Orography

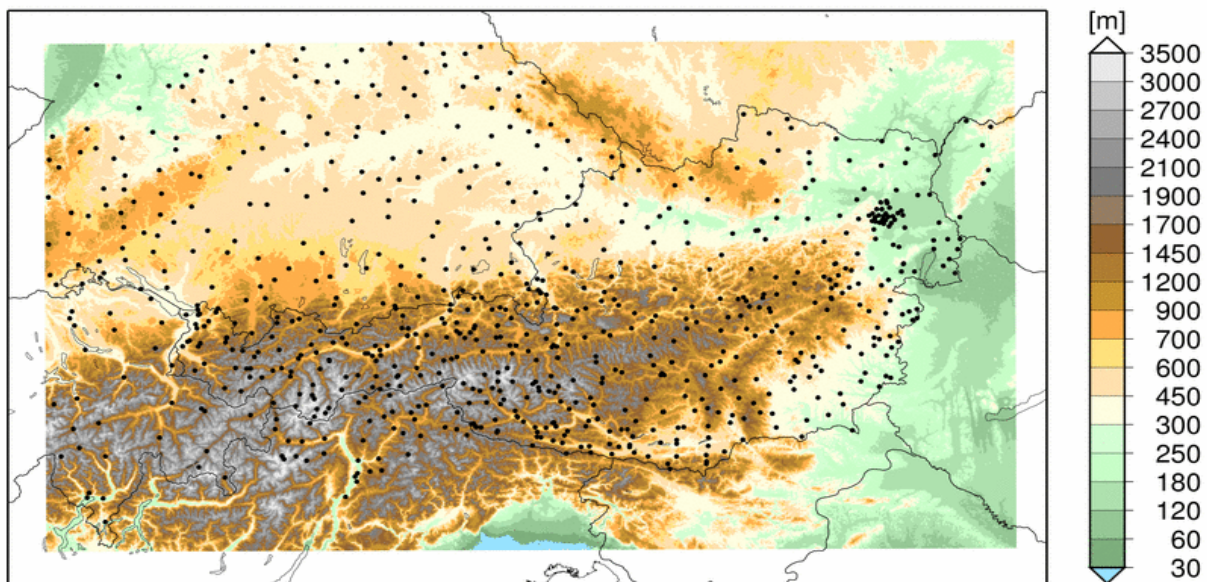

**Figure 4:** Austrian domain, topography and the locations of the stations of the nowcasting system INCA.


**Table 4:** Meteorological fields analyzed and nowcasted in INCA (SFC = surface station data, SAT = satellite data, RAD = radar data)

Nowcasting field	Required observations	Update
Temperature	SFC: 2m temperature SAT: MSG cloud types (optional)	1 hour
Humidity	SFC: 2m humidity	1 hour
Wind	SFC: 10m wind and gusts	10 min
Precipitation	SFC: precipitation RAD: radar precipitation	5-15 min
Precipitation type	Derived from precipitation and temperature nowcast	15 min
Cloudiness	SAT: MSG cloud types SFC: sunshine% (optional)	15 min
Global radiation	SAT: MSG cloud types SFC: global radiation	1 hour
Convective diagnostics	Derived from temperature, humidity and wind nowcast	1 hour

The most important applications of INCA products are flood prediction and warning (Komma *et al.*, 2007), road weather prediction, and predictions for the energy sector. Verification shows that the average performance of INCA as measured by MAE significantly exceeds that of NWP models (ALADIN, ECMWF) during the first 2-3 hours of the forecast in the case of precipitation (not shown), and even further in the case of temperature (Fig. 5).



Precipitation nowcasting includes a parameterization of elevation effects on the precipitation distribution in mountainous terrain as for the short durations typical in nowcasting (15 min), the intensity-dependence of the elevation effect has to be taken into account (Haiden and Pistotnik, 2009).

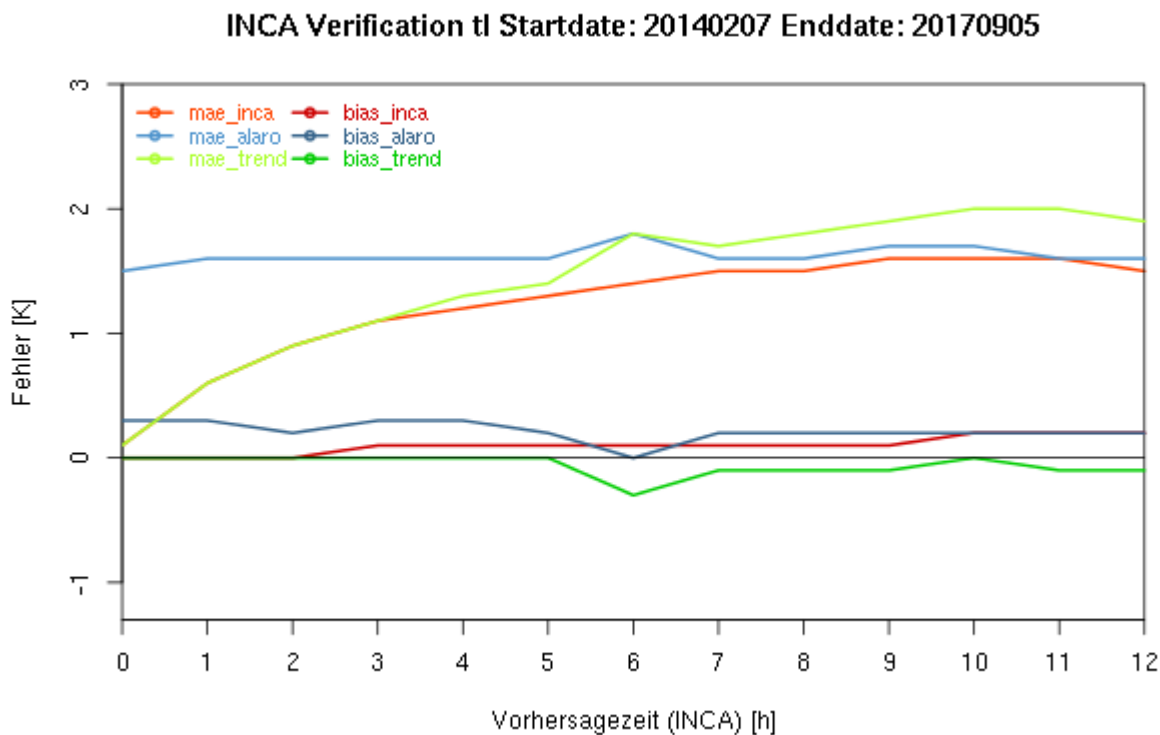

**Figure 5:** Mean absolute error and bias of the INCA temperature forecast for all Austrian stations as a function of lead time for the period 07-02-2014 to 05-09-2017 (in red). Also shown, for comparison, corresponding values for the ALARO model (blue) and persistency (green)

#### 4.4.1.2 Research performed in this field

The INCA system has been further refined with respect to the model background. Operationally, the ALARO model (on 5km horizontal resolution) is used, and it has been tested if a convection resolving model provides improved model backgrounds. Generally, the higher the NWP skill the higher is the analysis and nowcasting skill. However, the double penalty effect which becomes more evident on higher resolution potentially introduces problems which had to be solved adequately before an operational implementation. There were also developments in the improvement of data filter algorithms, uncertainty estimation of analysis and nowcasts, especially for convective precipitation. Newest developments are focusing on analyses on the sub-kilometre scale (e.g. up to 100m) including the simulation of local effects on the temperature and wind distribution.

### 4.4.2 Models for Very Short-range Forecasting Systems

#### 4.4.2.1 In operation

The INCA system smoothly blends the nowcast with downscaled NWP forecasts using a pre-defined weighting function. For precipitation, global weights give full weight to the nowcast for the first hour, and decreases linearly between +1 and +4 hours.

#### 4.4.2.2 Research performed in this field

## 4.5 Specialized numerical predictions


### 4.6 Extended range forecasts (ERF) (10 days to 30 days)

#### 4.6.1 Models

##### 4.6.1.1 In operation

Locally none (ECMWF products are used).

Extended range forecast products are generated with special respect to Austria. 2m temperature, 10m wind speed, precipitation and cloudiness are visualized for major Austrian cities as a function of forecast projection (Fig. 6).

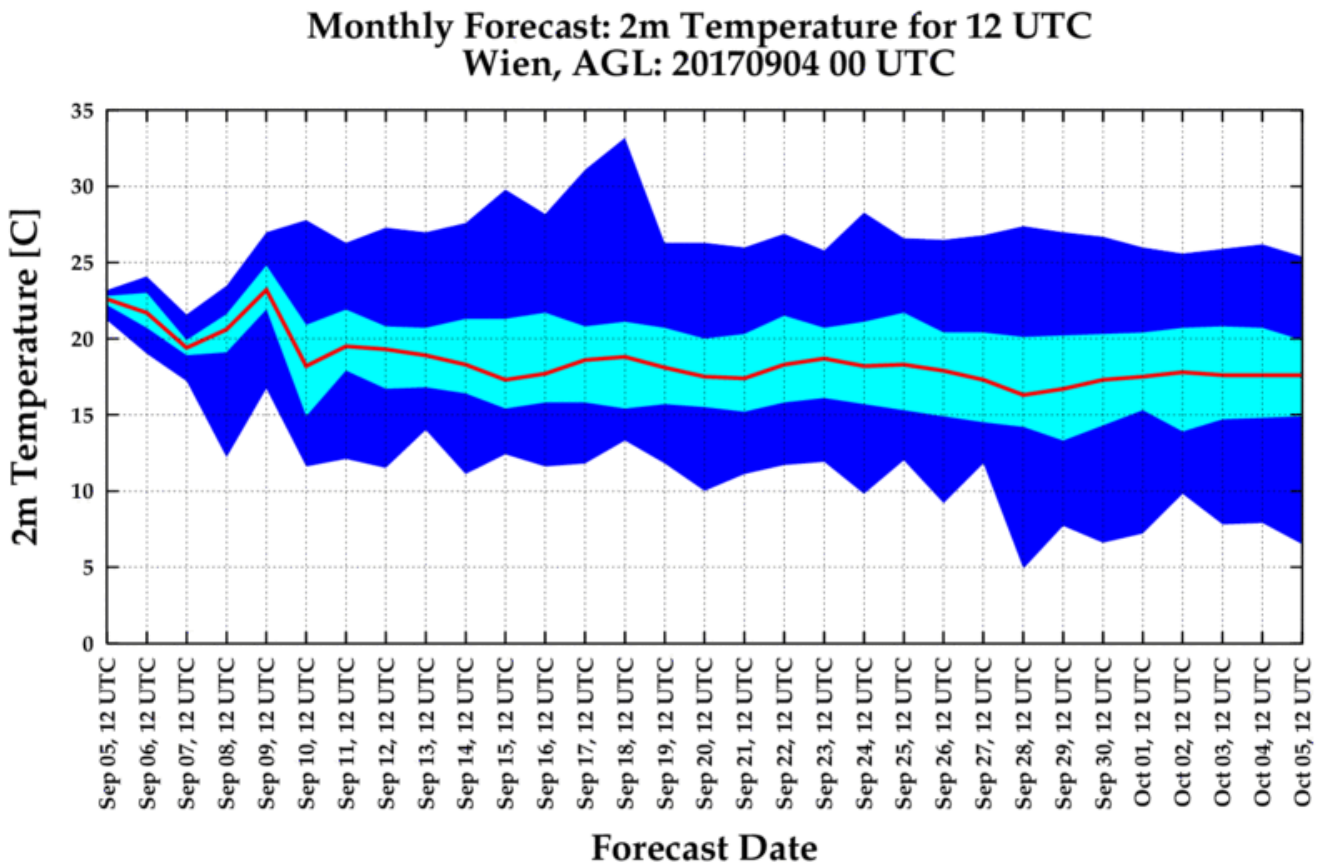

**Figure 6:** 5%, 25%, 50%, 75% and 95% percentiles of ECMWF 2m temperature as a function of forecast range. Initialization date: 04.09.2017, 00UTC. Forecast for Vienna.

#### 4.6.2 Operationally available NWP model and EPS ERF products


## 4.7 Long range forecasts (LRF) (30 days up to two years)

### 4.7.1 In operation

The fifth generation of the ECMWF seasonal forecasting system, SEAS5, was introduced 1 November 2017, replacing System 4. SEAS5 includes updated versions of the atmospheric (IFS) and interactive ocean (NEMO) models and adds the interactive sea ice model LIM2.

Operational data are obtained and post-processed to satisfy local requirements. Among others, probabilities for negative, neutral and positive temperature anomalies for the coming season are calculated (see Fig 7).

## Monatsmitteltemperatur für Österreich September/Okttober/November

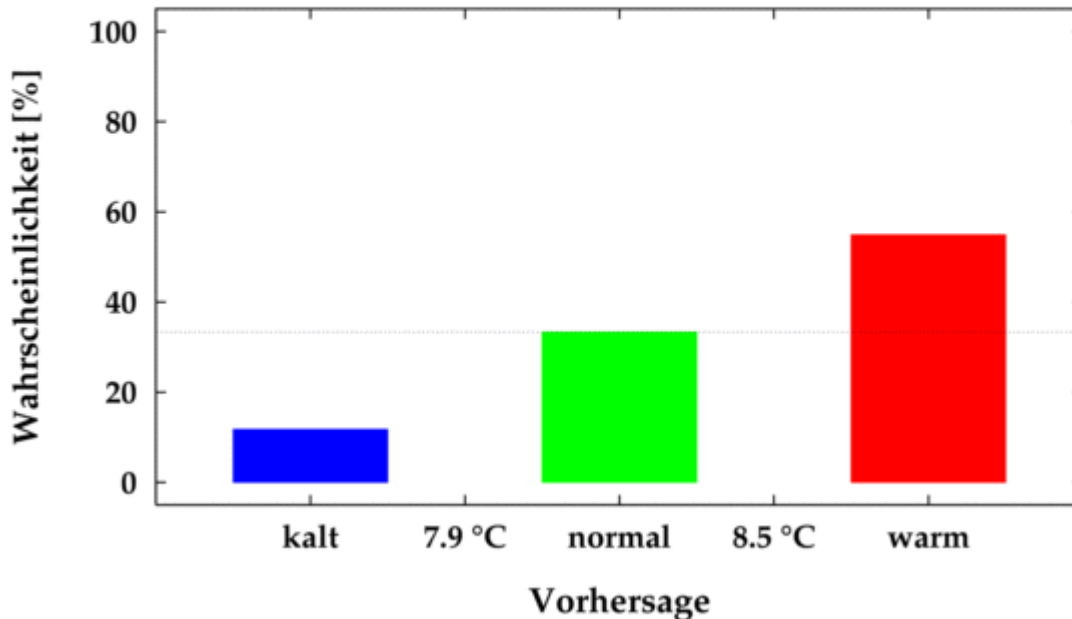

**Figure 7:** Probability [%] for predicted mean temperature anomalies for the coming season (SON 2017) for Austria: The probabilities for negative (blue box), neutral (green) and positive (red) anomalies are shown. The anomalies have been calculated with respect to a hindcast period from 1981 onwards.

### 4.7.2 Research performed in this field


### 4.7.3 Operationally available EPS LRF products

## 5. Verification of prognostic products

Verification is done for the prognostics products of the operational ALARO, AROME and INCA model and other available models:

- Point forecast vs. synop: 2m temperature, 2m relative humidity, 10m wind speed, 10m wind direction, 10m gust speed, mean sea level pressure, total cloudiness, global radiation
- Precipitation forecast: Verification is done on rectangular domains using INCA precipitation analysis as a reference. Beside traditional grid-point and areal mean scores (POD, FAR, HSS, etc) the object based method SAL is used.
- Cloud cover: Similar to what is done for precipitation, SAL is used to evaluate the cloud cover forecast for different models. INCA cloud cover analysis is used as observation (combination of ground radiation measurements and satellite products)
- Free atmosphere: Verification of model fields (temperature, geopotential, wind speed, relative humidity) on several standard pressure heights is done against the models own analysis and alternatively radiosoundings.
- Long term scores: ZAMG NWP Index (see Fig. 8) is used to monitor the long term evolution of the forecast quality. The index represents a weighted combination of MAE, RMSE and ETS for different forecast parameters (2m temperature, 2m relative humidity, 10m wind speed and direction, mean sea level pressure, precipitation, global radiation)

ZAMG NWP INDEX (2005-02-01 - 2017-12-31)

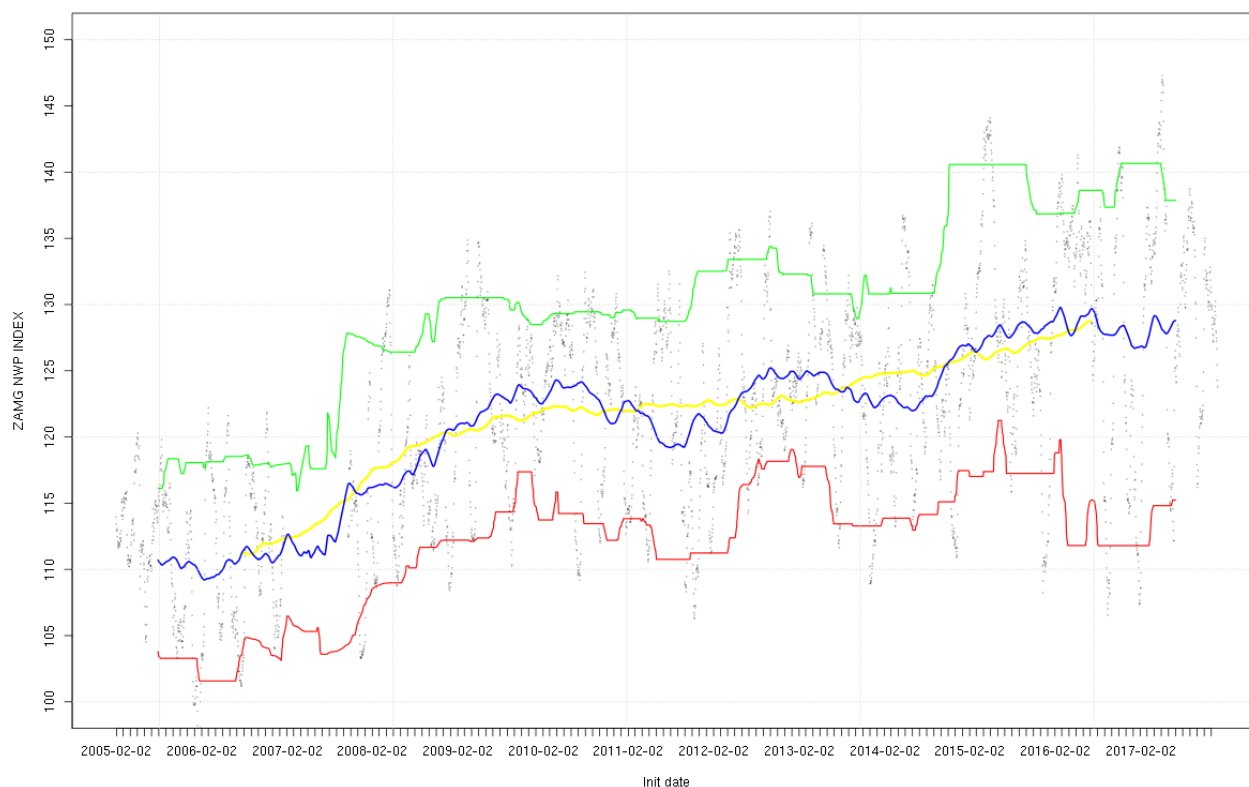

**Figure 8:** Running average for mean (blue), 90% percentile (green) and 10% percentile (red) for ZAMG NWP Index from 2005 to 2017. Higher values indicate increase of performance.

## 6. Plans for the future (*next 4 years*)

### 6.1 Development of the GDPFS

### 6.2 Planned research Activities in NWP, Nowcasting and Long-range Forecasting

#### 6.2.1 Planned Research Activities in NWP

- Continuation of development of AROME nowcasting system and further exploitation of observation types with high spatial and temporal resolution in the data assimilation scheme
- Further development of the C-LAEF Ensemble system: Extension of the parameter/process based stochastic physics scheme on further parts of the AROME physics (turbulence, radiation, shallow convection, etc.)
- Radar assimilation: Continuation of work towards an operational implementation of radar data (reflectivity and Doppler winds) in the AROME system and combine it with latent heat nudging using INCA gridded precipitation analysis
- Increase of assimilated radar stations by exploitation of OPERA data
- Gathering experience using a very fine resolution version of AROME (approx. 500m grid resolution)

#### 6.2.2 Planned Research Activities in Nowcasting

- The Ensemble INCA system will be refined by including uncertainty information from C-LAEF

- A seamless probabilistic system is currently developed, integrating nowcasting and calibrated NWP models in an optimized, blended way.
- New, non-conventional observation data will be exploited in the future (“crowd-sensing”)
- Future vision: Smart combination of NWP, observation and artificial intelligence

### 6.2.3 Planned Research Activities in Long-range Forecasting

## 7. References [ALLE]

Bénard P., J. Vivoda, J. Masek, P. Smolikova, K. Yessad, Ch. Smith, R. Brozkova and J.-F. Geleyn, 2009: Dynamical kernel of the Aladin-NH spectral limited-area model: formulation and sensitivity experiments. *Quart. Jour. Roy. Meteor. Soc.*, **136**, 155-169.

Cuxart, J., Ph. Bougeault, and J.L. Redelsperger, 2000: A turbulence scheme allowing for mesoscale and large eddy simulations. *Q. J. R. Meteorol. Soc.*, **126**, 1-30.

Gerard L, Piriou JM, Brozkova R, Geleyn J-F, Banciu D. 2009. Cloud and precipitation parameterization in a meso-gamma scale operational weather prediction model. *Mon. Weather Rev.* **137**: 3960–3977.

Haiden, T., and G. Pistotnik, 2009: Intensity-dependent parameterization of elevation effects in precipitation analysis. *Adv. Geosci.*, **20**, 33-38.

Haiden T, Kann A, Wittmann C, Pistotnik G, Bica B, Gruber C. 2011. The Integrated Nowcasting through Comprehensive Analysis (INCA) System and Its Validation over the Eastern Alpine Region. *Weather and Forecasting* **26**: 166-183.

Komma, J., C. Reszler, G. Blöschl, and T. Haiden, 2007: Ensemble prediction of floods - catchment non-linearity and forecast probabilities. *Nat. Haz. Earth Syst. Sci.*, **7**, 431-444.

Pinty, J.P. & P. Jabouille, 1998 : A mixed-phased cloud parameterization for use in a mesoscale non-hydrostatic model: simulations of a squall line and of orographic precipitation. Preprints of Conf. On Cloud Physics, Everett, WA, Amer. Meteor. Soc., 217-220.

Pergaud, J., Masson, V., Malardel, S., Couvreur, F. (2009). A Parameterization of Dry Thermals and Shallow Cumuli for Mesoscale Numerical Weather Prediction. *Bound.-Layer Meteor.*, **132**, 83-106.

Mlawer, E. J., Taubman, S. J., Brown, P. D., Iacono, M. J. and Clough, S. A. (1997). Radiative transfer for inhomogeneous atmospheres: RRTM, a validated correlated-k model for the longwave. *J. Geophys. Res.*, **102D**, 16663–16682.

Morcrette, J.-J. (1991). Radiation and cloud radiative properties in the ECMWF operational weather forecast model. *J. Geophys. Res.*, **96D**, 9121–9132.

Masson V., Seity Y., 2009: Including atmospheric layers in vegetation and urban offline surface schemes., *J. Applied. Met. and Clim.*, **48**, 1377–1397.

Seity, Y., P. Brousseau, S. Malardel, G. Hello, P. Bénard, F. Bouttier, C. Lac and V. Masson, 2011: The AROME-France Convective-Scale Operational Model. *Mon. Wea. Rev.*, **139**, 976–991.

Wang Y, Haiden T, Kann A. 2006a. 'The operational limited-area modelling system at ZAMG: ALADIN-Austria'. *Osterreich. Beitr. Meteorol. Geophys.* **37**: ISSN 1016–6254.

Wang Y, Bellus M, Wittmann C, Steinheimer M, Weidle F, Kann A, Ivatek- Sahdan S, Tian W, Ma X, Tascu S, Bazile E. 2011. The Central European limited-area ensemble forecasting system: ALADIN-LAEF. *Q. J. R. Meteorol. Soc.* **137**: 000–000. DOI:10.1002/qj.751

