

Thermodynamic Profiling and Humidity Mapping for Local High-Impact Weather Prediction

R. Ware^{1,2,3}, R. Anthes⁴, L. Blanchette¹, M. Eilts⁵, I. Gultepe⁶,
S. Heckman⁷, M. Jackson⁸, A. MacDonald⁹, R. Marshall⁷, M. Murakami¹⁰,
M. Nelson¹, V. Markin¹, M. Rajeevan¹⁰, R. Serafin², Y. Xie⁹

¹Radiometrics (Boulder, CO, USA)

²National Center for Atmospheric Research (Boulder, CO, USA)

³Cooperative Institute for Research in Environmental Sciences (Boulder, CO, USA)

⁴University Corporation for Atmospheric Research (Boulder, CO, USA)

⁵Weather Decision Technologies (Norman, OK, USA)

⁶Meteorological Research Division, EC (Toronto, ON, Canada)

⁷Earth Networks (Germantown, MD, USA)

⁸Trimble Navigation (Westminster, CO, USA)

⁹Earth Systems Research Laboratory, NOAA (Boulder, CO, USA)

¹⁰Meteorological Research Institute, JMA (Tsukuba, Japan)

¹¹Ministry of Earth Sciences (New Delhi, India)

Abstract

Early stage convection has been detected in temperature and humidity parameters derived from ground-based microwave radiometer profiler observations. This capability can be extended to regional scales using combined GNSS¹ and radiometer data for three-dimensional humidity mapping. We present examples of radiometer-derived thermodynamic parameters during early stage convection and tornadic supercell analysis including 1DVAR radiometer profiles, and describe opportunity for humidity mapping evaluation in a hazardous weather testbed.

Convective Storms

Convective storms are initiated by vertical motion of humid air due to converging winds, thermals, or wind passage over rising terrain. Air cools and expands as it moves upward, triggering water vapor condensation. Latent heat released by the condensation causes the air parcel to continue rising. The rising air draws additional lower level humid air upward, releasing more latent heat. During typical convection, each 10 cubic meters of air releases roughly the amount of energy in a cubic centimeter of gasoline, generating a familiar mushroom-shaped convective storm. The total energy release in a typical convective storm that creates gust front winds, lightning, hail and rain can be 25 kT or more.

Boundary Layer Measurements

It is widely recognized that a practical and cost effective way to improve high impact local weather forecasting is via enhanced thermodynamic (temperature and humidity) and wind monitoring in the boundary layer where severe weather originates and exacts its personal and economic tolls. The U.S. National Research

¹ Global Navigation Satellite System.

Council recommends a 400-site national wind and thermodynamic monitoring network to improve high impact local weather forecasting (NRC 2008, 2010, 2012).

The economic impact of convective storms in the U.S. totals tens of billions of dollars per year (Lazo et al, 2011) -- better forecasting of these events would provide greater productivity and reduce personal hazard and economic loss.

Continuous Thermodynamic and Liquid Profiling

Radiosondes typically provide twice-daily high resolution temperature, humidity and wind soundings, whereas radiometers provide continuous temperature, humidity and liquid soundings (Campos et al, 2014; Serke et al, 2014; Ware et al, 2013; Cimini et al, 2011). Radiosonde soundings are routinely assimilated into numerical weather models and can also be used to generate traditional forecast indices for local high impact weather forecasting. However, radiosonde sampling intervals are typically inadequate to effectively forecast convective and other local weather events that develop on time scales of several hours. This presents an opportunity to improve local high impact weather forecasting using continuous boundary layer thermodynamic and wind information.

Severe Storm

The June 29, 2012, Derecho was one of the most destructive and deadly fast-moving severe thunderstorm events in North American history. It produced torrential rains and wind gusts approaching 150 km/hr in Washington, D.C., on the evening of June 29, 2012. It caused 22 deaths and widespread damage that left millions without power for nearly a week.

Radiometer observations from a private network² 30 km northwest of Washington, D.C., show an extremely unstable atmosphere with hurricane strength wind potential more than six hours in advance (Figure 1). CAPE (Moncrieff and Miller, 1976) and Windex (McCann, 1994) derived from radiometer and radiosonde (30 km away) soundings are shown in Table 1.

Table 1. CAPE and Windex derived from Germantown radiometer and Dulles radiosonde data (30 km southwest of radiometer).³

Date Time	Sensor	CAPE (J/kg)	Windex (kt)
29Jun12 12Z	Radiometer	0	26
	Radiosonde	125	18
30Jun12 00Z	Radiometer	2579	62
	Radiosonde	4409	71

² <http://earthnetworks.com/Products/BoundaryLayerNetwork.aspx>

³ RAOB analysis (www.raob.com).

The radiometer and radiosonde soundings show good agreement, in spite of their 30 km separation.

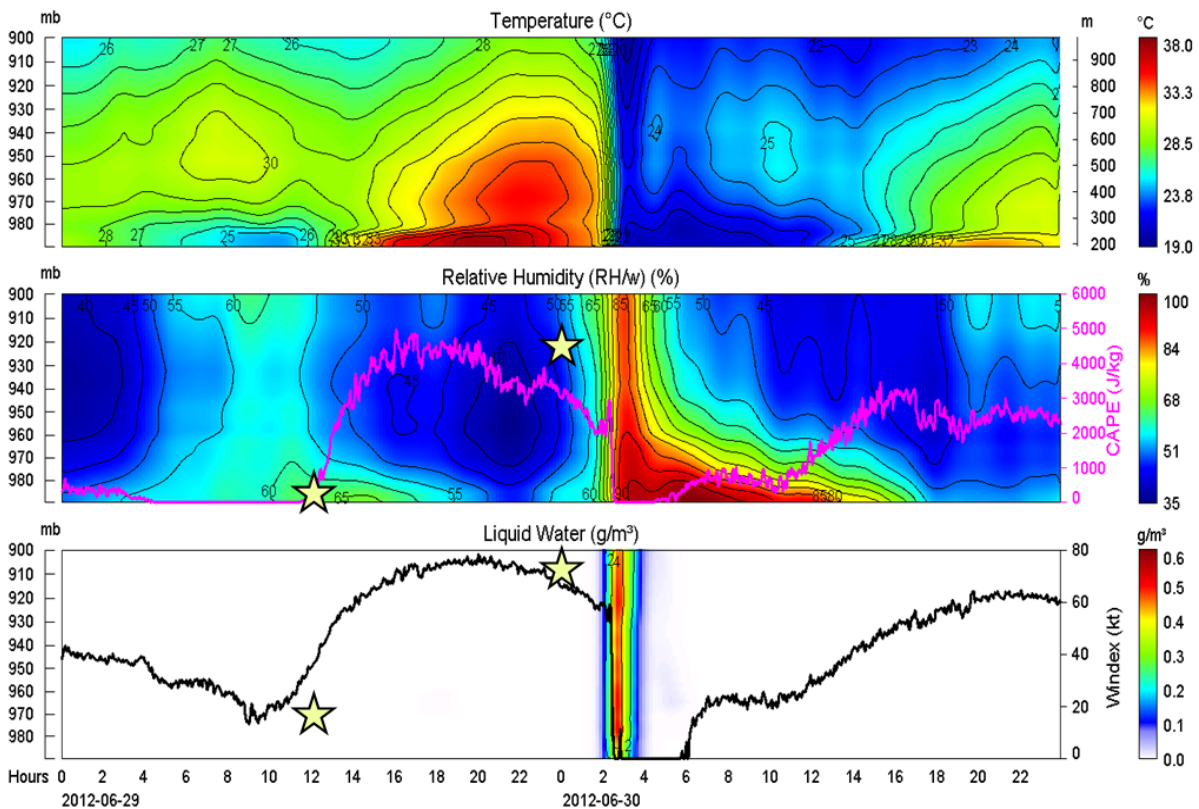


Figure 1. Radiometer profiles to 1 km height with superimposed CAPE and Windex derived from radiometer and radiosonde (stars) data⁴.

In this case, knowledge of extremely unstable atmospheric conditions (CAPE = 5,000 J/kg) and hurricane force wind potential (Windex = 80 kt = 148 km/hr) more than 6 hours in advance could have contributed to more accurate severe weather warnings. However, relatively large CAPE and Windex maxima are seen the following day and severe weather did not follow. This suggests that additional information such as that described in the following sections may be required to avoid false alarms.

Lightning Prediction Hours in Advance

Good agreement has been reported between thermodynamic parameters derived from collocated radiometer and radiosonde soundings at a tropical station (Madhulatha et al, 2013; Ratnam et al, 2013). An algorithm was developed using radiometer data from 26 thunderstorm cases that combined thermodynamic parameters associated with the occurrence of thunderstorms. Included were K index, humidity index, precipitable water, stability index and equivalent potential temperature lapse rate. Algorithm testing on an independent set of nine thunderstorms demonstrated that thermodynamic indices derived from radiometer soundings can be used to predict thunderstorms at least two hours in advance.

⁴ RAOB (www.raob.com) analysis and display.

Electric field mill (EFM) measurements (Evans and Velkoff, 1972) commonly used to assess lightning risk for space launch operations are shown in Figure 2, along with collocated boundary layer thermodynamic measurements.

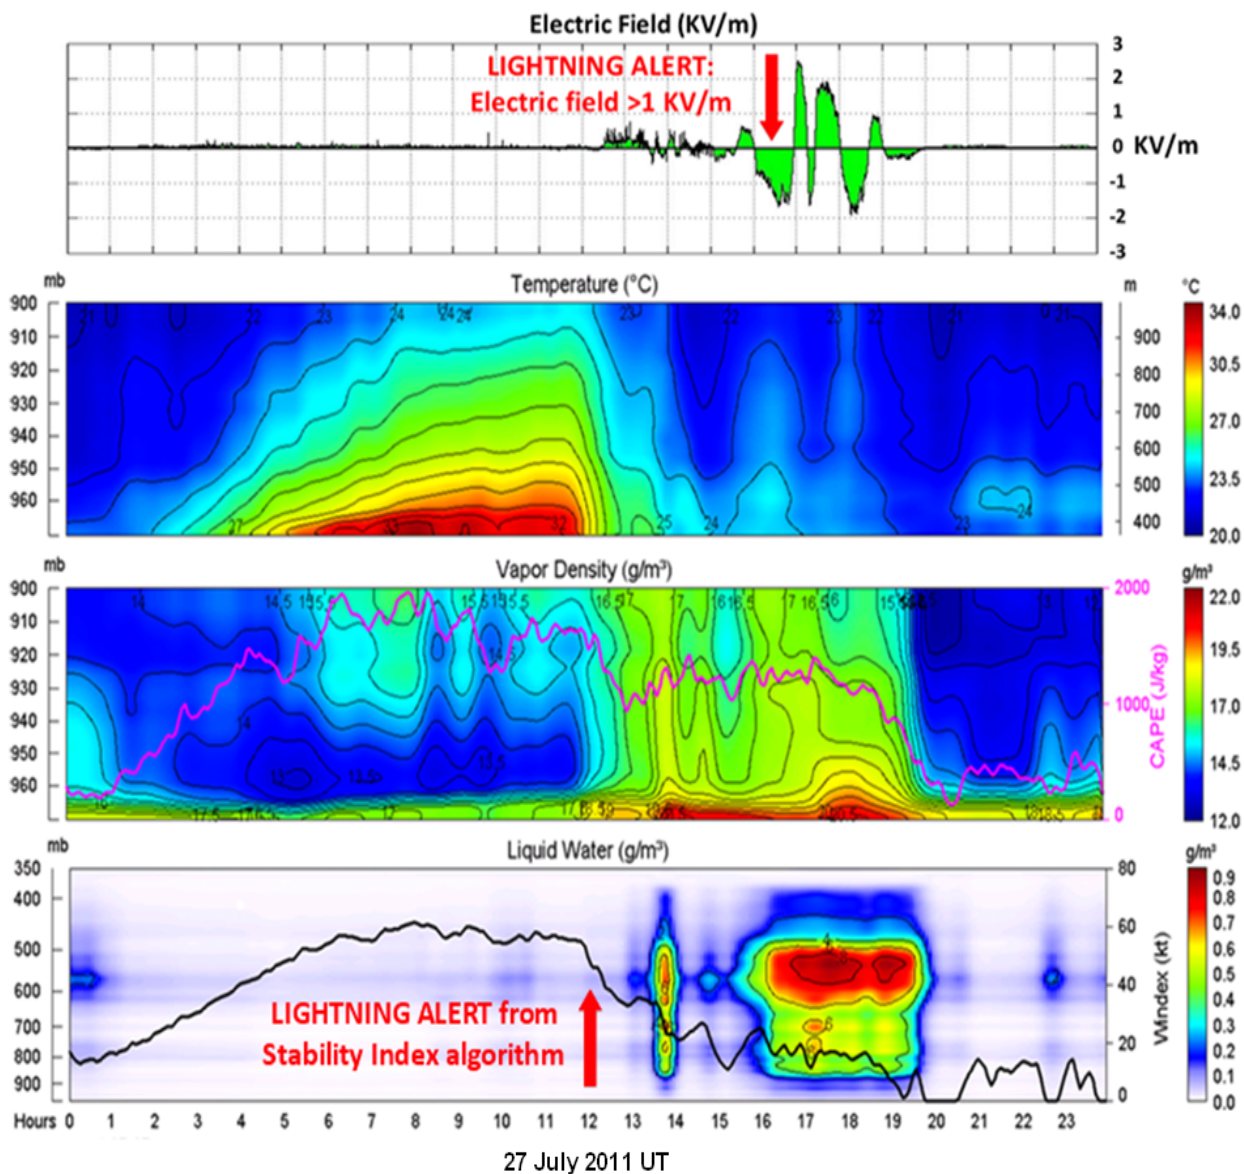


Figure 2. Lightning alerts from electric field and thermodynamic measurements.⁵

At 1615 UT the electric field exceeded 1 kV/m, a threshold that mandates a scrub decision for India space launch operations. CAPE and Windex forecast index time series are superimposed on the contour plots in the bottom two panels. These indices fall by nearly 40% from 1200 to 1300 UT, correlated with large boundary layer temperature and vapor density variations. These signatures precede the traditional electric field warning threshold by more than three hours. Similar plots for the same radiometer dataset are presented by Madhulatha et al (2013) that did not employ radiometer observation and retrieval methods optimized for accurate performance during rain (Xu et al, 2014).

⁵ RAOB (www.raob.com) analysis and display.

Three-Dimensional Humidity Mapping

Humidity convergence during early stage convection can be detected in microwave radiometers and GNSS signals before it generates hydrometeors detectable by radar (Bauer et al, 2011; Liu and Xue, 2006; MacDonald et al, 2002). Integrated water vapor along receiver-satellite lines-of-sight (slant water vapor) can be estimated from ground-based GNSS receiver and surface meteorological data (Ware et al, 1997; 2000). If these estimates are combined with radiometer humidity profiles three-dimensional humidity fields associated with early stage convection can be uniquely mapped (MacDonald et al, 2002).

Tornadic Supercell Analysis

A supercell tornado passed within 14 km of a radiometer at Tateno, Japan, on 6 May 2012. Doppler radar observations and hydrometeor density (rainwater, snow and graupel) analysis including 1DVAR radiometer retrievals⁶ are shown in Figure 3 (Araki et al, 2014).

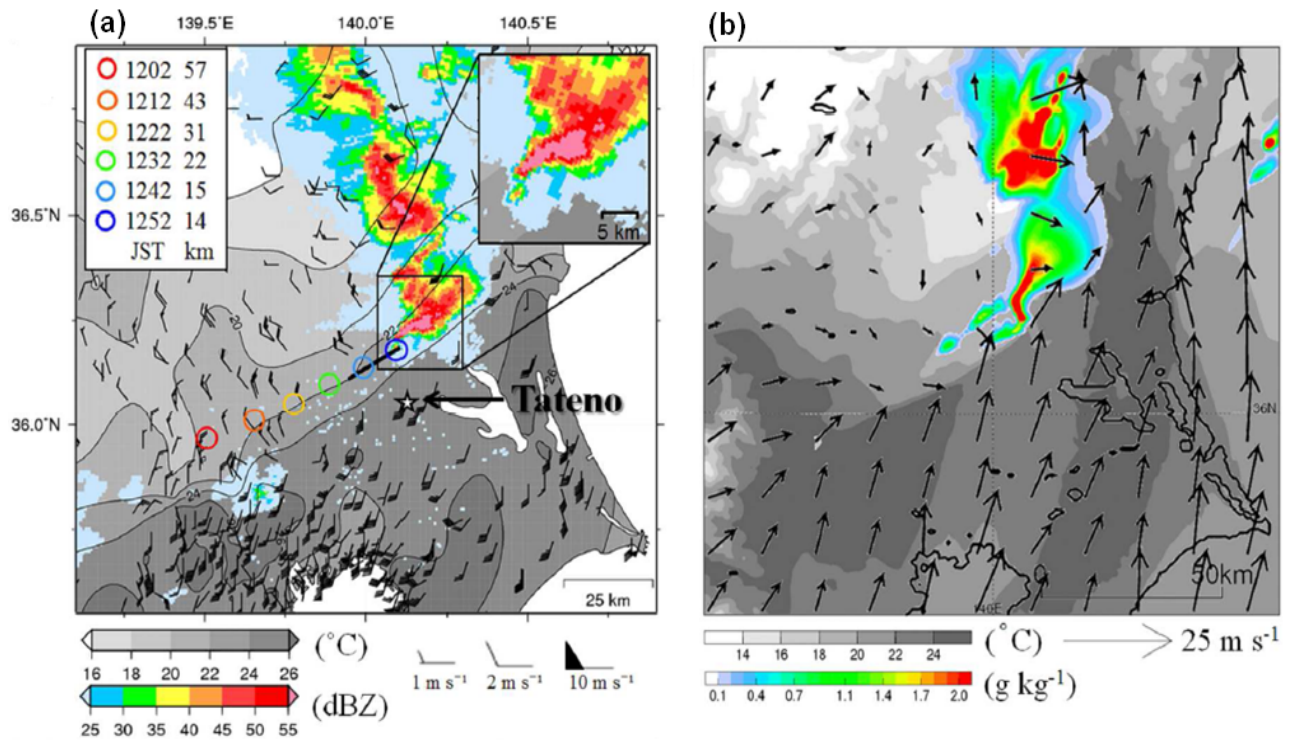


Figure 3. Radar observations (a), and analysis (b) including radiometer data. Hook echos are evident in (a) with time and distance from Tateno indicated by colored circles, and in (b) at 1245 JST.

For this case study ten forecast indices were derived from 1DVAR soundings⁷. Ninety minutes before the tornado, the convective available potential energy

⁶ One dimensional variational analysis using radiometer and radiosonde derived background error covariance (Ishimoto, 2014; Cimini et al, 2011; Hewison, 2007).

⁷ Forecast indices were derived from 1DVAR retrievals in this section and in previous sections from radiometer data alone.

increased significantly. At the time of minimum distance to the supercell, low-level vertical wind shear and some composite parameters were consistent with Significant Tornadoic (SIGTOR) supercell activity. High resolution water vapor density analysis from a 17-km grid GNSS network (Shoji et al, 2014) is similar to the hydrometeor density pattern in Figure 3 (b). This case study demonstrates realistic tornado modeling when continuous radiometer profiles are assimilated, with promise for further improvement if GNSS moisture data are included.

Hazardous Weather Testbed

The NOAA Hazardous Weather Testbed⁸ (HWT) evaluates the operational utility of new science, technology and products. A principal experimental objective is improved understanding of convective initiation (Kain et al, 2013). Radiometer and GNSS data are being collected in the Dallas-Ft. Worth region during spring 2014 (Figure 4). Network station density averages 52 km, adequate to evaluate three-dimensional humidity mapping and detection of moisture convergence associated with early stage convection (MacDonald et al, 2002). Network data assimilation into variational LAPS (Albers et al, 2013; Xie et al, 2011) is planned as part of the spring 2014 HWT experiments.

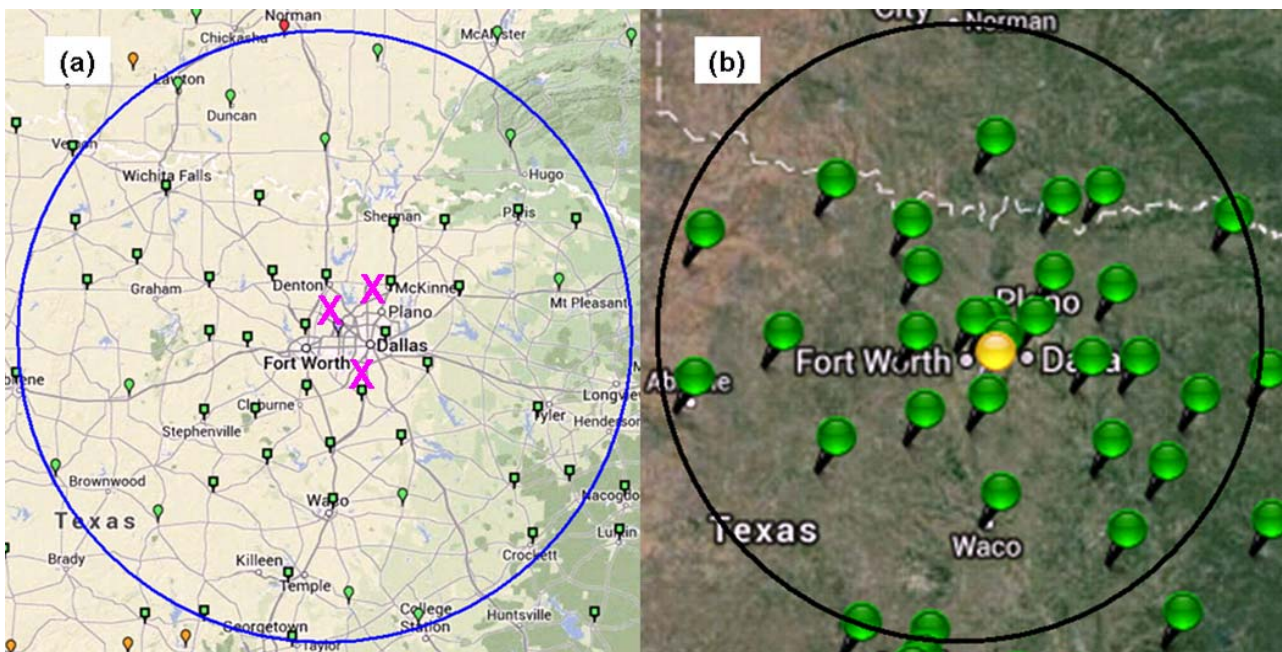


Figure 4. 47 public (a) and 27 private (b) GNSS stations and 3 private radiometer stations (X) within 250 km of Dallas-Ft. Worth.

Summary

Humidity convergence detection during early stage convection using microwave radiometer and GNSS observations is a promising development. Specifically, predictive thermodynamic parameters associated with early stage convection have been identified in this paper and reports of lightning prediction hours in advance of

⁸ http://hwt.nssl.noaa.gov/spring_experiment

traditional electric field monitoring methods are discussed. If moisture measurements from GNSS data are included, three dimensional humidity mapping is possible. Experiments to seek convective initiation signatures in radiometer-generated stability index time series and to improve high resolution forecast models via radiometer and positioning satellite network data assimilation are underway. Initial case studies using radiometer data alone demonstrate capability for high impact local weather forecasting several hours in advance.

References

- Albers, S., Y. Xie, H. Jian, D. Birkenheuer, I. Jankov and Z. Toth, [The Variational Version of the Local Analysis and Prediction System \(LAPS\): Hot-start Data Assimilation of Convective Events](#), WRF Workshop, June 26, 2013.
- Araki, K., H. Ishimoto, M. Murakami and T. Tajiri, Temporal Variation of Close-Proximity Soundings within a Tornadoic Supercell Environment, SOLA (in review), 2014.
- Bauer, H., V. Wulfmeyer, T. Schwitalla, F. Zus and M. Grzeschik, [Operational assimilation of GPS slant path delay measurements into the MM5 4DVAR system](#), Tellus, 2011.
- Campos, E., R. Ware, P. Joe and D. Hudak, [Monitoring water phase dynamics in winter clouds](#), Atmospheric Research, 2014.
- Cimini, D., E. Campos, R. Ware, S. Albers, G. Giuliani, J. Oreamuno, P. Joe, S. Koch, S. Cober and E. Westwater, [Thermodynamic atmospheric profiling during the 2010 winter Olympics Using ground-based microwave radiometry](#), IEEE Transactions Geoscience and Remote Sensing, 2011.
- Cimini, D., M. Nelson, J. Güldner and R. Ware, Forecast indices from ground-based microwave radiometer for operational meteorology, IEEE Transactions Geoscience and Remote Sensing (in preparation), 2014.
- Evans, J., and H. Velkoff, [The Design, Test and Evaluation of a Miniaturized Electric Field Meter](#), US ARO Technical Report, 1972.
- Güldner, J., [A model-based approach to adjust microwave observations for operational applications: results of a campaign at Munich airport in winter 2011/2012](#), Atmospheric Measurement Technology, 2013.
- Hewison, T., [1D-VAR Retrieval of Temperature and Humidity Profiles from Ground-based Microwave Radiometers](#), IEEE Transactions Geoscience and Remote Sensing, 2006.
- Ishimoto, H., Analysis of microwave radiometric data using a 1DVAR technique, Meteorological Research Notes, (in press, in Japanese), 2014.
- Kain, J., M. Coniglio, J. Correia, A. Clark, P. Marsh, C. Ziegler, V. Lakshmanan, S. Miller, S. Cembek, S. Weiss, F. Kong, M. Xue, R. Sobash, A. Dean, I. Jirak and C. Melik, [A Feasibility Study for Probabilistic Convection Initiation Forecasts Base on Explicit Numerical Guidance](#), Bulletin of the American Meteorological Society, 2013.
- Lazo, J., M. Lawson, P. Larsen and D. Waldman, [U.S. Economic Sensitivity to Weather Variability](#), Bulletin of the American Meteorological Society, 2011.

- Liu, H., and M. Xue, [Retrieval of Moisture from Slant-Path Water Vapor Observations of a Hypothetical GPS Network Using a Three-Dimensional Variational Scheme with Anisotropic Background Error](#), MWR, 2006.
- MacDonald, A., Y. Xie and R. Ware, [Diagnosis of Three Dimensional Water Vapor Using Slant Observations from a GPS Network](#), Monthly Weather Review, 2002.
- Madhulatha, A., M. Rajeevan, M. Ratnam, J. Bhate and C. Naidu, [Nowcasting severe convective activity over southeast India using ground-based microwave radiometer observations](#), Journal of Geophysical Research, 2013.
- McCann, D., [WINDEX-A new index for forecasting microburst potential](#), Weather and Forecasting, 1994.
- Moncrieff, M., and M. Miller, [The dynamics and simulation of tropical cumulonimbus and squall lines](#), Quarterly Journal Royal Meteorological Society, 1976.
- Ratnam M., Y. Santhi, M. Rajeevan and S. Rao, [Diurnal variability of stability indices observed using radiosonde observations over a tropical station: comparison with microwave radiometer measurements](#) Atmospheric Research, 2013.
- Serke, D., E. Hall, J. Bognar, A. Jordan, S. Abdo, K. Baker, T. Seite, M. Nelson, A. Reehorst, R. Ware, F. McDonough and M. Politovich, [Supercooled liquid water content profiling case studies with a new vibrating wire sonde compared to a ground-based microwave radiometer](#), Atmospheric Research (in review), 2014.
- U.S. National Research Council, [Observing Weather and Climate from the Ground Up: A Nationwide Network of Networks](#), National Academies Press, 2008.
- U.S. National Research Council, [When Weather Matters: Science and Service to Meet Critical Societal Needs](#), National Academies Press, 2010.
- U.S. National Research Council, [Weather Services for the Nation: Second to None](#), National Academies Press, 2012.
- Shoji, Y., H. Yamauchi, W. Mashiko and E. Sato, [Estimation of Local-scale Precipitable Water Vapor Distribution Around Each GNSS Station Using Slant Path Delay](#), SOLA, 2014.
- Ware, R., C. Alber, C. Rocken and F. Solheim, [Sensing integrated water vapor along GPS ray paths](#), Geophysical Research Letters, 1997.
- Ware, R., D. Fulker, S. Stein, D. Anderson, S. Avery, R. Clark, K. Droegemeier, J. Kuettnner, J. Minster and S. Sorooshian, [SuomiNet: A Real-Time National GPS Network](#), Bulletin of the American Meteorological Society, 2000.
- Ware, R., D. Cimini, E. Campos, G. Giuliani, S. Albers, M. Nelson, S.E. Koch, P. Joe and S. Cober, [Thermodynamic and liquid profiling during the 2010 Winter Olympics](#), Atmospheric Research, 2013.
- Xie, Y., S. Koch, J. McGinley, S. Albers, P. Bieringer, M. Wolfson and M. Chan, [A Space–Time Multiscale Analysis System: A Sequential Variational Analysis Approach](#), Monthly Weather Review, 2011.
- Xu, G., R. Ware, W. Zhang, G. Feng, K. Liao and Y. Liu, [Effect of off-zenith observations on reducing the impact of precipitation on ground-based microwave radiometer measurement accuracy in Wuhan](#), Atmospheric Research, 2014.